REPORT DOCUMENTATION PAGE		Form Approved OMB NO. 0704-0188			
searching existing data sources, gathering and mair regarding this burden estimate or any other asp Headquarters Services, Directorate for Information	ntaining the data needed, ect of this collection of Operations and Repor other provision of law, n ol number.	and completing a information, include ts, 1215 Jefferson	nd revie ding sug Davis	sponse, including the time for reviewing instructions, swing the collection of information. Send comments ggesstions for reducing this burden, to Washington Highway, Suite 1204, Arlington VA, 22202-4302. In any oenalty for failing to comply with a collection of	
1. REPORT DATE (DD-MM-YYYY)	2. REPORT TYPE			3. DATES COVERED (From - To)	
26-09-2012	Final Report			1-Sep-2011 - 31-May-2012	
4. TITLE AND SUBTITLE			5a. CONTRACT NUMBER		
Towards Snakes and Snake Robots on Grannular Terrain			W911NF-11-1-0404		
		5b. (5b. GRANT NUMBER		
		5c. P 611		AM ELEMENT NUMBER	
6. AUTHORS		5d. P	5d. PROJECT NUMBER		
Howie Choset					
		5e. T	ASK N	UMBER	
		5f. W	ORK U	NIT NUMBER	
7. PERFORMING ORGANIZATION NAMES AND ADDRESSES Carnegie Mellon University Office of Sponsored Programs Carnegie Mellon University Pittsburgh, PA 15213 -				PERFORMING ORGANIZATION REPORT MBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S) ARO		
U.S. Army Research Office P.O. Box 12211			NUM	SPONSOR/MONITOR'S REPORT MBER(S)	
Research Triangle Park, NC 27709-2211			6073	37-EG-II.3	
12. DISTRIBUTION AVAILIBILITY STATEMEN	NT				
Approved for Public Release; Distribution Unlimited	ed				
13. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in the of the Army position, policy or decision, unless so			ld not co	ontrued as an official Department	
14. ABSTRACT Autonomous ground vehicles are becoming various EOD vehicles, the use of ground ve on granular surfaces such as sand. Moreove proposed work seeks to address both of the the motion of snake robots undergoing a sign	chicles is quite limited er, conventional vehic se short comings by lo	l by their mobili les are limited t ooking at sidew	ity. Cur o relati inding	rrent vehicles have trouble vely flat terrains. The snakes to model and control	

15. NUMBER

OF PAGES

17. LIMITATION OF

ABSTRACT

UU

15. SUBJECT TERMS

a. REPORT

UU

granular terrains, geometric mechanics, snake robots

c. THIS PAGE

UU

16. SECURITY CLASSIFICATION OF:

UU

b. ABSTRACT

19a. NAME OF RESPONSIBLE PERSON

Howard Choset

412-268-2495

19b. TELEPHONE NUMBER

Report Title

Towards Snakes and Snake Robots on Grannular Terrain

ABSTRACT

Autonomous ground vehicles are becoming more and more prevalent in today's military. Despite the success of various EOD vehicles, the use of ground vehicles is quite limited by their mobility. Current vehicles have trouble on granular surfaces such as sand. Moreover, conventional vehicles are limited to relatively flat terrains. The proposed work seeks to address both of these short comings by looking at sidewinding snakes to model and control the motion of snake robots undergoing a sidewinding gait. Snake robot have the potential of threading through tightly packed volumes accessing locations that people and conventional machinery otherwise cannot. The benefit to the military is that we gain a deeper understanding of how mobile mechanisms function on sandy terrains, and moreover, access to regions that conventional vehicles could not otherwise reach.

We chose to examine sidewinding because it is an efficient gait employed by several species of snakes. This form of locomotion is also particularly useful for snake robots, as it involves no sliding contact between the snake and the terrain (such as appears in e.g., lateral undulation), and therefore does not require that the snake robot have wheels or other means of providing different friction coefficients in the lateral and longitudinal directions.

This project brings together two researchers, Choset whose group has developed principled work in mechanics and Goldman, whose group has studied and modeled lizards maneuvering in granular media. Goldman has recently begun studying sidewinders, making this an ideal collaboration for the two PIs. While our goal is to create fully functional robots, we also believe that the proposed work will develop a deeper understanding of how biological systems locomote.

Enter List of papers submitted or published that acknowledge ARO support from the start of the project to the date of this printing. List the papers, including journal references, in the following categories:

(a) Paners nublished in neer-reviewed journals (N/A for none)

	(a)	1 apers published in peer-reviewed journais (IVA for hone)		
Received	<u>Paper</u>			
TOTAL:				
Number of Papers	published in peer-revi	ewed journals:		
	(b) Pa	apers published in non-peer-reviewed journals (N/A for none)		
Received	<u>Paper</u>			
TOTAL:				
Number of Papers published in non peer-reviewed journals:				
(c) Presentations				

Non Peer-Reviewed Conference Proceeding publications (other than abstracts):

Received

Number of Presentations:

2012/09/26 1: 2 Yang Ding, Daniel I. Goldman, Ross L. Hatton1, Howie Choset. Geometric Mechanics for Sand-swimming,

CLAWAR. 2012/08/24 00:00:00, .:,

0.00

TOTAL: 1


	Peer-Revi	ewed Conference Proceeding pub	lications (other than abstracts):
Received	<u>Paper</u>		
TOTAL:			
Number of Peer-Rev	iewed Conference Pr	oceeding publications (other than abstra	icts):
		(d) Manuscrij	ots
Received	<u>Paper</u>		
TOTAL:			
Number of Manuscr	ipts:		
		Books	
Received	<u>Paper</u>		
TOTAL:			
		Patents Submi	tted
		Patents Award	led
		Awards	
We were nominated	for best student paper	at CLAWAR	
		Graduate Stude	
NAME Ross Hatton	1	PERCENT_SUPPORTED 0.50	Discipline
FTE Equiva		0.50	
Total Numb	er:	1	
		Names of Post Doc	torates
<u>NAME</u>		PERCENT SUPPORTED	
FTE Equiva			

Names of Faculty Supported

NAME	PERCENT SUPPORTED	National Academy Member			
Howie Choset	0.00				
FTE Equivalent:	0.00				
Total Number:	1				
	Names of Under Graduate st	udents supported			
NAME	PERCENT_SUPPORTED				
FTE Equivalent:					
Total Number:					
	Student Metr	ios			
This section only ap	Student Metrics This section only applies to graduating undergraduates supported by this agreement in this reporting period				
	The number of undergraduates funded by t	his agreement who graduated during this period: 0.00			
The number of undergraduates funded by this agreement who graduated during this period with a degree in science, mathematics, engineering, or technology fields: 0.00					
		o graduated during this period and will continue			
to pu	to pursue a graduate or Ph.D. degree in science, mathematics, engineering, or technology fields: 0.00				
Number of graduating undergraduates who achieved a 3.5 GPA to 4.0 (4.0 max scale): 0.00					
Number of graduating undergraduates funded by a DoD funded Center of Excellence grant for					
Education, Research and Engineering: 0.00					
The number of	The number of undergraduates funded by your agreement who graduated during this period and intend to				
TI 1 C	work for the Department of Defense 0.00				
The number of undergraduates funded by your agreement who graduated during this period and will receive scholarships or fellowships for further studies in science, mathematics, engineering or technology fields: 0.00					
Scholarships	or renowships for further studies in science	, mathematics, engineering of technology fields 0.00			
Names of Personnel receiving masters degrees					
<u>NAME</u>					
Total Number:					
Names of personnel receiving PHDs					
<u>NAME</u> Ross Hatton					
Total Number:	1				
Names of other research staff					
<u>NAME</u>	PERCENT SUPPORTED				

Sub Contractors (DD882)

FTE Equivalent: Total Number:



Dan Goldman and I charted out some new areas of research that would tie together my prior work in gaits and locomotion and his work in granular media. The CLAWAR paper, uploaded as part of this report, summarizes that work quite nicely.

Technology Transfer

Geometric Mechanics for Sand-swimming

Ross L. Hatton^{1*}, Yang Ding², Daniel I. Goldman,² and Howie Choset¹

¹Robotics Institute, Carnegie Mellon University

²School of Physics, Georgia Institute of Technology

*rlhatton@cmu.edu


Sand-swimming, a form of desert burrowing, offers interesting potential as a locomotion mode for robots operating in loose, granular environments. Unfortunately, the computational cost of modeling the relevant physics raises obstacles to a thorough exploration of the system dynamics. Geometric mechanics offers techniques for reducing the complexity of evaluating gaits, thereby offering the potential for exploring a gait design space; unfortunately, these tools have historically been restricted to systems with linear, analytical dynamics. In this paper, we present a framework for combining empirical data from nonlinear models with geometric gait evaluation methods. The resulting tools both reduce the computational costs of describing sand-swimming and reveal fundamental aspects of the motion.

Keywords: geometric mechanics, sand-swimming, gait

Introduction

Sand-swimming, a burrowing mode employed by some desert-dwelling animals, offers interesting possibilities for robotic locomotion in similar environments, especially where concealment or harsh surface conditions are a concern. To make use of this mode of locomotion, however, it is necessary to move beyond simple biological inspiration and identify its key physical principles. In our past work,^{1,2} we have developed models of sand-swimming that capture the granular flows and forces acting on the locomoting system. These models are, however, computationally expensive, making it difficult to experiment with different body morphologies or gait patterns. In this paper, we develop computational procedures that allow us to both better understand the fundamental physics of locomotion in granular flow and to expediently evaluate gaits so that we can more readily explore the design space of mechanism and controller.

The tools developed in this paper have a solid foundation in geomet-






Fig. 1. (a) Sandfish lizard. (b) Three-link robot on bed of plastic particles. LED masts at the end of the robot allow for tracking while robot is submerged.

ric mechanics. This field offers several methods for reducing computational complexity in locomotion problems. First, it introduces notions of *symmetry* that present opportunities for efficient re-use of expensive calculations. Second, these symmetries identify effective gait cycles with geometric features on a system's configuration space, ³ allowing them to be directly identified with minimal trial-and-error iteration. Unfortunately, these methods have historically been restricted to systems with analytically-describable linear dynamics, and have not found wider use in considering systems in non-linear or non-analytic regimes.

To move past these limitations on geometric analysis, and bring their benefits to complex locomotion modes like sand-swimming, we have developed a hybrid approach that uses a geometric framework to organize empirical information gleaned from nonlinear physics models. This approach gives us considerable insight into sand-swimming, highlighting how gait amplitudes and patterns contribute to the displacements they induce. Additionally, the underlying framework is inherently generalizable to other physical domains, suggesting further avenues of exploration.

1. Sand-swimming

Sand-swimming is a form of locomotion exhibited by a variety of desert animals, such as the sandfish lizard in Fig. 1(a). These organisms move below the surface of the terrain, protecting themselves from heat and predators while stalking their own prey. An interesting feature of this motion is that the sand around the animal can act as a granular frictional fluid,² making the progress of the organism much more akin to swimming than it is to burrowing or walking. We have investigated sand-swimming at several levels, including computational modeling and both biological and robotic experiments. The key products of this research are a detailed (and compu-

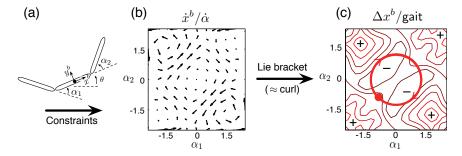


Fig. 2. (a) An example three-link system with joint angles α . (b) Many systems' dynamics can be reduced to linear constraints between a system's body velocity and its shape velocity $\dot{\alpha}$, represented by vector fields. (c) The net displacement from a gait corresponds to the areas it encloses on the components of the *Lie bracket* of the fields (approximately their curls). These plots are for a three-link sandswimmer, and were derived via the method described in §3.

tationally expensive) discrete element model (DEM) of the granular flow around a sand-swimmer, capturing the motions of individual grains; a simpler (but still nonlilnear) resistive force theory model for the forces on a body moving through a granular medium, fit to empirical data from the DEM; and a robotic test platform, a three-link version of which appears in Fig. 1(b). These tools allow us to evaluate the motion of a sand-swimmer, but the time taken for a given evaluation (on the order of days for a DEM simulation of a given gait) makes extensive trials prohibitively costly.

2. Geometric Mechanics

Geometric mechanics applies principles from differential geometry to problems in classical mechanics. 4,5 A powerful application of these principles to locomotion is the reduction of many mobile systems' equations of motion to a set of shape-dependent linear constraints between its body velocity and its rate of shape change. $^{3,6-12}$ These constraints can be visualized as a set of vector fields, like that shown in Fig. 2(b). Applying a function called the *Lie bracket* (conceptually similar to curl) to these fields measures how the constraints vary over different shapes. By Stokes's theorem, the net displacement over any gait corresponds to the area it encloses on these Lie bracket functions. For example, the gait in Fig. 2(c) negatively (counterclockwise) encloses a negative region of the function, and so produces a positive x^b displacement of the system.

Lie bracket approaches are based on an identity between the exponential

4

coordinates* $z(\phi)$ of the net displacement over a gait ϕ (a closed trajectory in the shape space) and a series whose first two terms correspond to the integral of the abstract curvature of the constraints over a region of the shape space bounded by ϕ .¹³ The Lie bracket measures the curvature of the constraints encoded by the local connection, which also corresponds to the net translation induced by a differential oscillation in the system's shape. In two dimensions, the identity appears as

$$z(\phi) = \iint_{\phi} \underbrace{-\text{curl}\mathbf{A} + \left[\mathbf{A}_{1}, \mathbf{A}_{2}\right] d\alpha + \text{higher-order terms,}}_{\text{nonconservativity}} d\alpha + \text{higher-order terms,}$$
(1)

where the curl operator is applied individually to each row of \mathbf{A} , and $[\mathbf{A}_1, \mathbf{A}_2]$ is the *local* Lie bracket of the columns of \mathbf{A} (taken as if \mathbf{A} did not depend on the shape), which evaluates on SE(2) as


$$\begin{bmatrix} \mathbf{A}_1, \mathbf{A}_2 \end{bmatrix} = \begin{bmatrix} a_{y1} a_{\theta 2} - a_{y2} a_{\theta 1} \\ a_{x2} a_{\theta 1} - a_{x1} a_{\theta 2} \\ 0 \end{bmatrix}. \tag{2}$$

In (1), the curl term measures the *nonconservativity* of the local connection, or how the constraints change over the shape space, preventing antipodal segments of a gait from pushing or pulling the system equally. The local Lie bracket and higher order terms correspond to the *noncommutativity* of the system's position space, *i.e.*, the extent to which translations with intermediate rotations do not commute, as in parallel parking maneuvers.

3. Hybrid Emprical-Geometric Mechanics

Geometric constraint models like those shown in Fig. 2 both improve the speed of computation—they are typically faster to evaluate than the raw forcing equations on a given system—and allow for simple characterization of gait effects via the Lie bracket. In past work, however, it has been assumed that these constraints can only be generated from analytically-describable linear physics models, such as the conservation-of-momentum

^{*}The exponential coordinates of a position are the components of the constant body velocity required to reach that position in unit time, starting from the origin. A mapping between exponential coordinates and displacements is provided in various sources, ¹¹ but for the purposes of this paper, it is sufficient to note that this mapping is an identity mapping for pure translation or pure rotation; i.e. $\exp\left([z_x,z_y,0]^T\right)=(z_x,z_y,0)$ and $\exp\left([0,0,z_\theta]^T\right)=(0,0,z_\theta)^{.11}$






Fig. 3. (a) The body velocity of the sand-swimmer is empirically a linear function of the shape velocity $\dot{\alpha}$. (b) Geometric analysis of an empirically-fit sandswimmer model gives good accuracy, at a fraction of the computational cost.

constraints acting on a satellite or the low-Reynolds number flows around a micro-organism. Granular flow produces nonlinear forces that must often be evaluated through simulation, which would initially seem to disqualify it from such analysis.

In our work with sand-swimmers, however, we have observed that these nonlinear forces combine to produce nearly-linear system velocities, as shown in Fig. 3(a). Fitting linear functions to this velocity relationship (at a reasonably-dense sampling of shapes) produces a geometric constraint model that approximates the behavior of the sand-swimmer. This constraint model is orders of magnitude faster to evaluate than the DEM (seconds verses days), and, as shown in Fig. 3(b), gives an accurate approximation of the system motion for gaits with all but the largest joint motions. Further, by observing patterns in the Lie bracket function, we can see why the displacement grows and falls off with amplitude as it does: small amplitude gaits enclose sign-definite areas, so increasing the amplitude increases the net displacement, while very large gaits enclose both positive and negative areas, and so do not experience the same growth in displacement.

4. Optimal Coordinates

A fundamental problem with integrating the motion of the system via Lie brackets is that they do not completely measure the net displacement; instead, they measure the "forwards minus backwards" motion in each body direction, together with a first-order approximation of the non-commutative effects of rotation coupled with translation. Although planar rotations al-

6

ways commute with each other and are unaffected by translations, translations specified in body coordinates only commute when there are no intervening rotations. For example, moving a system forward and backward by one unit each returns it to the origin, but interposing a rotation between the two steps leaves the system with a net translation. This noncommutativity can be captured

This lack of commutativity was long viewed as inherent to the locomoting systems. ¹¹ In our work on nonholonomic systems, however, we observed that in many instances the noncommutativity can be alleviated by an appropriate choice of body frame for the system. ³ In these choices of coordinates, the reference line on the system used to represent its orientation θ rotates very little in response to changes in shape, allowing the translation motions produced by those shape changes to "almost commute."

The optimal choice of body frame for a system are those for which the vector fields encoding the constraint are "smallest" – i.e. those for which a given change in shape produces the least translation and rotation of the system. We can directly solve for these optimal coordinates by first making an arbitrary choice of body frame (the center link is often a good choice, as it allows for convenient representation of the system kinematics, and finding the constraint vector fields for that frame. We can then find the body frame (out of the set of all body frames) whose motion relative to the first link during shape changes most cancels out the motion induced by the constraints. This operation takes the form of finding (conservative) gradient fields that are as close as possible to the constraint vector fields, as illustrated for orientation in Fig. 4. More details on this process are given in our prior work, including an implementation of body-frame optimization based on a *Hodge-Helmholtz decomposition*. ¹⁴

Conclusions

By combining our geometric and granular modeling tools, we have both increased the speed with which sand-swimmer gaits can be evaluated and gained insight into the forms taken by solutions to the gait equations. As we further explore sand-swimming and related motions, such as rubble-crawling, these tools will allow for rapid iteration of swimmer morphology and gait pattern, directing expensive simulations with the full suite of granular tools to the inputs where they will be most informative. We are also very interested in finding other applications of emperical-geometric models to provide insight into complex problems.

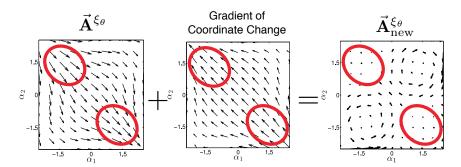


Fig. 4. Calculating the optimal body frame starts with finding the constraints in a convenient body frame, such as the middle link (left). The gradient of the optimal body frame's orientation relative to the middle link is the conservative vector field that is most opposite to the θ constraint field (center). The residual values after summing these two terms (right) are the new minimized constraint field, equivalent to finding the constraints in the optimal coordinates.

References

- Maladen R, Ding Y, Li C, Goldman D (2009) Undulatory Swimming in Sand: Subsurface Locomotion of the Sandfish Lizard. Science 325:314.
- Maladen RD, Ding Y, Umbanhowar PB, Kamor A, Goldman DI (2011) Mechanical models of sandfish locomotion reveal principles of high performance subsurface sand-swimming. J Roy Soc Interface 8:1332–1345.
- Hatton RL, Choset H (2011) Geometric motion planning: The local connection, Stokes's theorem, and the importance of coordinate choice. *International Journal of Robotics Research* 30:988–1014.
- 4. A. M. Bloch et al., Nonholonomic Mechanics and Control, Springer, 2003.
- R. ABRAHAM AND J. E. MARSDEN, Foundation of Mechanics, Addison Wesley, 1985.
- Shapere A, Wilczek F (1989) Geometry of self-propulsion at low Reynolds number. *Journal of Fluid Mechanics* 198:557–585.
- Murray R, Sastry S (1993) Nonholonomic Motion Planning: Steering Using Sinusoids. IEEE Transactions on Automatic Control 38:700–716.
- G. Walsh and S. Sastry, On reorienting linked rigid bodies using internal motions, Robotics and Automation, IEEE Transactions on, 11 (1995), pp. 139– 146
- S KELLY AND RICHARD M MURRAY, Geometric Phases and Robotic Locomotion, J. Robotic Systems, 12 (1995), pp. 417–431.
- 10. Ostrowski J, Burdick J (1998) The geometric mechanics of undulatory robotic locomotion. *International Journal of Robotics Research* 17:683–702.
- 11. Melli JB, Rowley CW, Rufat DS (2006) Motion Planning for an Articulated Body in a Perfect Planar Fluid. SIAM Journal of Applied Dynamical Systems 5:650–669.
- 12. Kanso E (2009) Swimming Due to Transverse Shape Deformations. Journal

8

 $of\ Fluid\ Mechanics\ 631:127-148.$

- 13. Radford JE, Burdick JW (1998) Local motion planning for nonholonomic control systems evolving on principal bundles. In *Proceedings of the International Symposium on Mathematical Theory of Networks and Systems* (Padova, Italy).
- 14. George B. Arfken, $Mathematical\ Methods\ for\ Physicists$, Elsevier, 6th ed., 2005.